



FAN SERIES

D06F

60x60x15mm - d.c.




FEATURES



- Glass fibre reinforced plastic (PBT) fan casing and impeller.
- Brushless dc motor. I.C. protected against running overload.
- Electrical connection via 2 leads UL1007 AWG24, 300mm long.
- Rated temperature range:
 - Ball bearing from -20°C to +70°C
 - Sleeve bearing from -10°C to +60°C
 - Hypro bearing from -10°C to +60°C
- Service life L10:
 - Ball bearing 70,000 hours at 40°C
 - 40,000 hours at t max
 - Sleeve bearing 50,000 hours at 40°C
 - 35,000 hours at t max
 - Hypro bearing 70,000 hours at 40°C
 - 40,000 hours at t max
- Weight 38g.

Please refer to our terms of sales including our warranty and limited liabilities clauses.

DRAWING

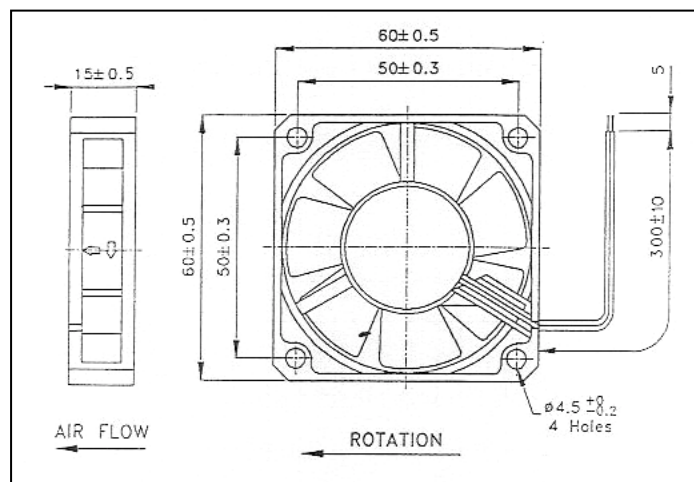

AIR FLOW CURVES

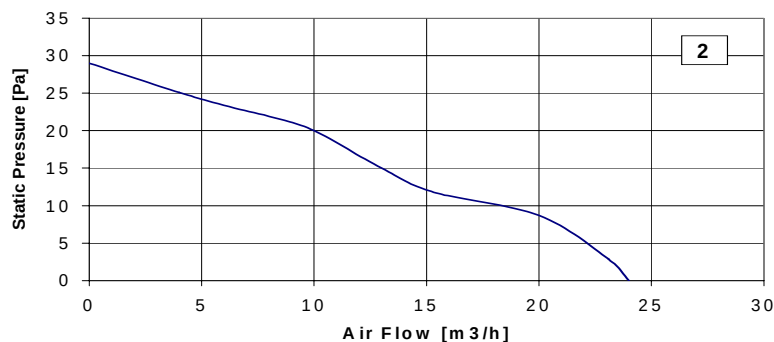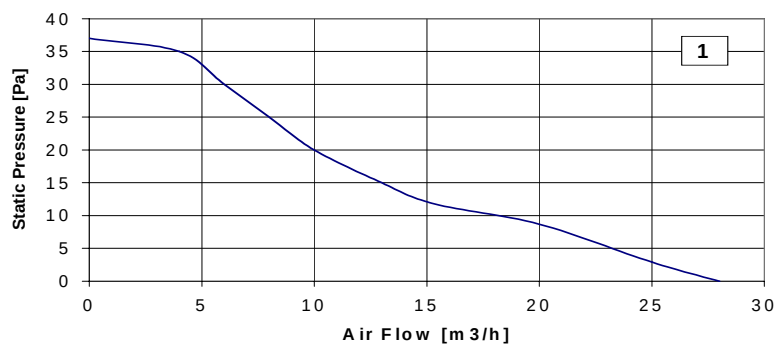

Model	Diagram	Bearing #			Rated Voltage [V]	Input Power [W]	Speed [rpm]	Air Flow [m³/h]	Static Pressure [Pa]	Noise [dB(A)]	Approvals		
		S	H	B							UL	CUL	TUV
D06F01HW#A00	1	★	★	★	5	1.9	4500	28	37	32.4	S,H,B		
D06F01MW#A00	2	★	★	★	5	1.3	3900	24	29	28.8	S,H,B		
D06F04HW#A00	1	★	★	★	12	1.6	4500	28	37	32.4	S,H,B		
D06F04MW#A00	2	★	★	★	12	1.3	3900	24	29	28.8	H,B		
D06F05HW#A00	1	★	★	★	24	2.2	4500	28	37	32.4			
D06F05MW#A00	2	★	★	★	24	1.7	3900	24	29	28.8			

“#” : S= Sleeve, H= Hypro, B= Ball