

AC axial fans

S-Range, Ø 250



ebm-papst • Mulfingen


Nominal data		Characteristic	Voltage	Frequency	Air flow	Speed/rpm	Power input	Current draw	Capacitor	Noise level	Max. back pressure	Perm. amb. temp.	Mass
Type	Motor		VAC	Hz	m³/h	min⁻¹	W	A	µF/VDB	dB(A)	Pa	°C	kg
*2D 250⁽¹⁾	M2D068-CF	①	230/400	50	1830	2500	100	0,20	---	69	150	65	2,1
			230/400	60	1950	2650	140	0,23	---	70	150	45	
*2E 250	M2E 068-CF	②	230	50	1820	2450	115	0,51	3,0/400	69	120	65	1,9
			230	60	1970	2600	150	0,66	3,0/400	71	85	50	
*4D 250⁽¹⁾	M4D068-CF	③	230/400	50	1010	1400	25	0,07	---	54	70	85	1,9
			230/400	60	1140	1580	32	0,07	---	57	70	80	
*4E 250	M4E 068-BF	④	230	50	1010	1400	42	0,19	1,5/400	54	80	55	1,9
			230	60	1200	1630	45	0,20	1,5/400	58	100	70	
*4S 250	M4S 068-CF	⑤	230	50	1000	1390	69	0,53	---	54	80	50	1,7
			230	60	1160	1600	63	0,45	---	58	80	65	

subject to alterations ⁽¹⁾ Current draw established at 400 VAC (Y)


	n [min⁻¹]	P ₁ [W]
① ①	2455	106
① ②	2310	125
④ ①	1370	43
④ ②	1360	45
⑤ ①	1370	71
⑤ ②	1360	73

	n [min⁻¹]	P ₁ [W]
② ①	2455	116
② ②	2290	132
③ ①	1375	27
③ ②	1350	30

Characteristics

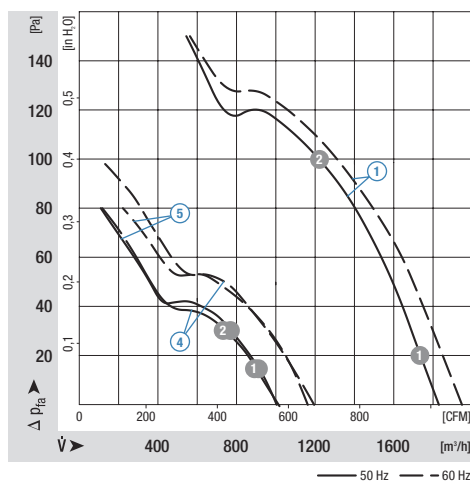

Characteristics

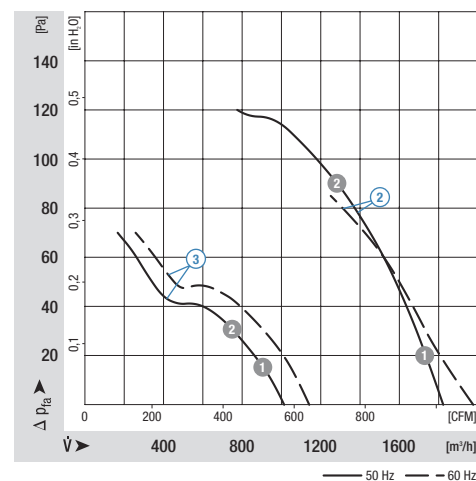

Selection	Cable exit	Direction of air flow							Dimensions						
Type	S/A/B								a	c	h	k	m	n	p
*2D 250	S	"V"	A2D250-AH02 -01	S2D250-BH02 -01	W2D250-CH02 -01	S2D250-AH02 -01			72	18	5	10	50	5	34
		"A"	A2D250-AI02 -01	S2D250-BI02 -01	W2D250-CI02 -01	S2D250-AI02 -01			72	21	0	0	45	0	34
*2E 250	B	"V"	A2E250-AL06 -01	S2E250-BL06 -01	W2E250-CL06 -01	S2E250-AL06 -01			72	18	5	10	50	5	34
		"A"	A2E250-AM06 -01	S2E250-BM06 -01	W2E250-CM06 -01	S2E250-AM06 -01			72	25	0	0	45	0	32
*4D 250	S	"V"	A4D250-AH22 -01	S4D250-BH22 -01	W4D250-CH22 -01	S4D250-AH22 -01			72	18	5	10	50	5	34
		"A"	A4D250-AI22 -01	S4D250-BI22 -01	W4D250-CI22 -01	S4D250-AI22 -01			72	23	0	0	45	0	34
*4E 250	S	"V"	A4E250-AH02 -01	S4E250-BH02 -01	W4E250-CH02 -01	S4E250-AH02 -01			62	14	5	10	50	5	34
		"A"	A4E250-AI02 -01	S4E250-BI02 -01	W4E250-CI02 -01	S4E250-AI02 -01			62	22	0	0	45	0	34
*4S 250	S	"V"	A4S250-AH02 -01	S4S250-BH02 -01	W4S250-CH02 -01	S4S250-AH02 -01			72	18	5	10	50	5	34
		"A"	A4S250-AI02 -01	S4S250-BI02 -01	W4S250-CI02 -01	S4S250-AI02 -01			72	23	0	0	45	0	34

